
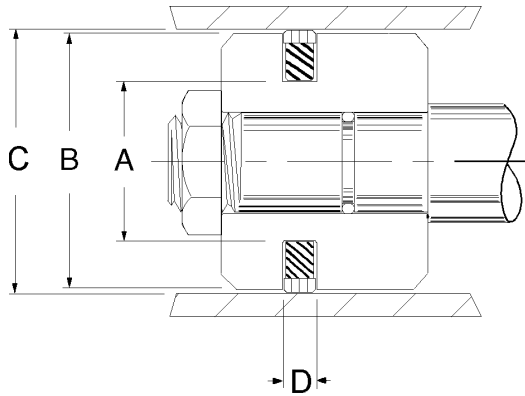


OK Metric Piston Seals



The OK style outer sealing rings are step cut, and are made from glass-filled polyamide. The rectangular energizer is a molded 70 durometer Shore A nitrile. They are primarily designed for heavy duty, double acting hydraulic applications. The sealing set is capable of passing a port and can be used up to 10,000 psi (680 bar) with proper fitting. It's advantages are small profile, resistant to shock loads, low breakout and running friction, even after lengthy standstill under high pressures. They install easily due to the split outer sealing ring and offer high abrasion and extrusion resistance at high pressures and large clearance gaps.

Temperature: -40 to 250F

Pressure: 0 to 7,250 PSI

Part Number						B Piston Dia. m m	Price			
Prefix	C Bore Dia. m m H 9	A Groove Dia. m m B	D Groove Width m m							
OK	-	70	X	51.7	X	7	X	69.2	\$	30.59
OK	-	80	X	64.5	X	6.3	X	79	\$	40.25
OK	-	80	X	59	X	8	X	79	\$	48.19
OK	-	90	X	74.5	X	6.3	X	89	\$	44.28
OK	-	90	X	69	X	8	X	89	\$	48.65
OK	-	95	X	74	X	8	X	94	\$	51.98
OK	-	100	X	84.5	X	6.3	X	99	\$	50.72
OK	-	100	X	79	X	8	X	99	\$	55.60
OK	-	110	X	89	X	8	X	108.8	\$	57.44
OK	-	115	X	94	X	8	X	113.8	\$	58.82
OK	-	120	X	99	X	8	X	118.8	\$	60.15
OK	-	125	X	104	X	8	X	123.8	\$	61.47
OK	-	130	X	109	X	8	X	128.8	\$	62.73
OK	-	140	X	119	X	8	X	138.8	\$	63.54
OK	-	150	X	129	X	8	X	148.8	\$	65.15
OK	-	160	X	139	X	8	X	158.8	\$	67.74
OK	-	180	X	159	X	8	X	178.8	\$	72.16
OK	-	190	X	169	X	8	X	188.8	\$	84.01
OK	-	200	X	179	X	8	X	198.8	\$	89.24
OK	-	220	X	199	X	8	X	218.4	\$	94.47
OK	-	280	X	255.5	X	8	X	278.4	\$	217.87
OK	-	320	X	292	X	9.5	X	317.8	\$	292.91
OK	-	330	X	302	X	9.5	X	327.8	\$	395.95

OK / 914 Piston Seals